


32 Channel Demux

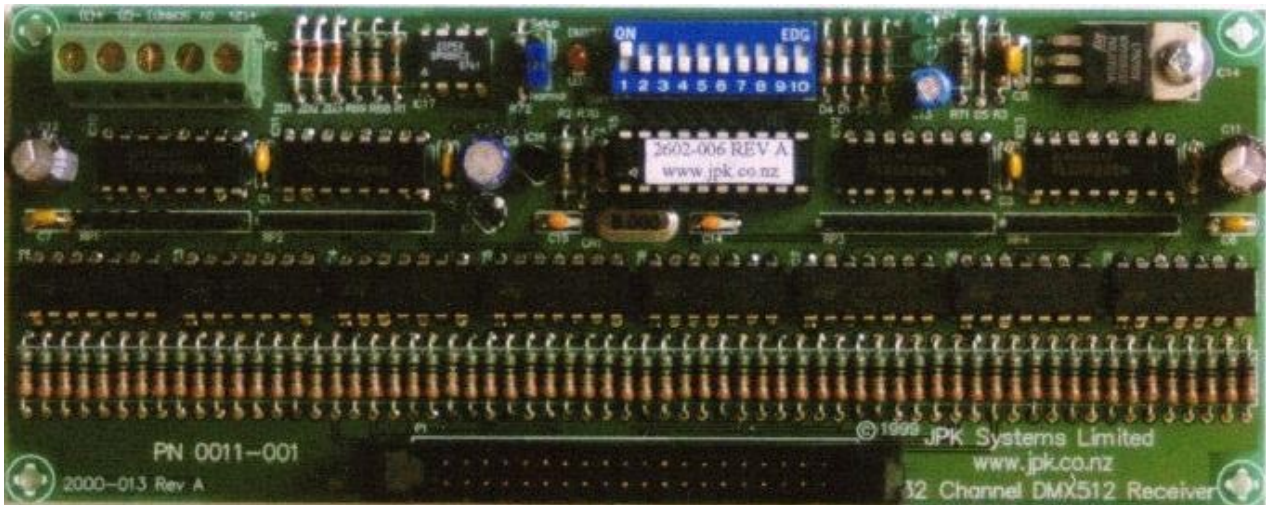

DMX Demultiplexers decode an incoming DMX512 data stream into analog voltages suitable for a wide array of equipment such as light dimmers and fog machines. When used with the optional screw terminal board this product is ideal for ILDA-ISP compliant DMX512 input laser projectors.

Features:

- Individually adjustable output ranges 0-5V or 0-10V
- Power and DMX512 indication
- Up to 20mA current supplied from each channel
- Compact design
- On board DMX line termination option
- Over voltage protection diodes on DMX line
- Optional screw terminal board with ILDA-ISP designation labels

Model Number:

0011-001 (32 Channel demultiplexer board)
0012-001 (32 Channel screw terminal board option) See our website for details

Specifications:

<i>Input signal:</i>	DMX512
<i>Outputs:</i>	32 analog signals 0-5V or 0-10V at up to 20mA each
<i>Output Connections:</i>	40 way ribbon cable header or optional screw terminal board
<i>Power requirements:</i>	12 – 15 Vdc 50mA min 370mA typ 690mA max
<i>Dimensions:</i>	165 x 67mm (6.5" x 2.6")

Local Distributor:

JPK Systems Ltd

PO Box 26-525, Epsom
Auckland, New Zealand
Tel: +64 21 672535 Fax: +64 21 672564

<http://www.jpko.co.nz>
info@jpko.co.nz