


# 5 Channel Contactor

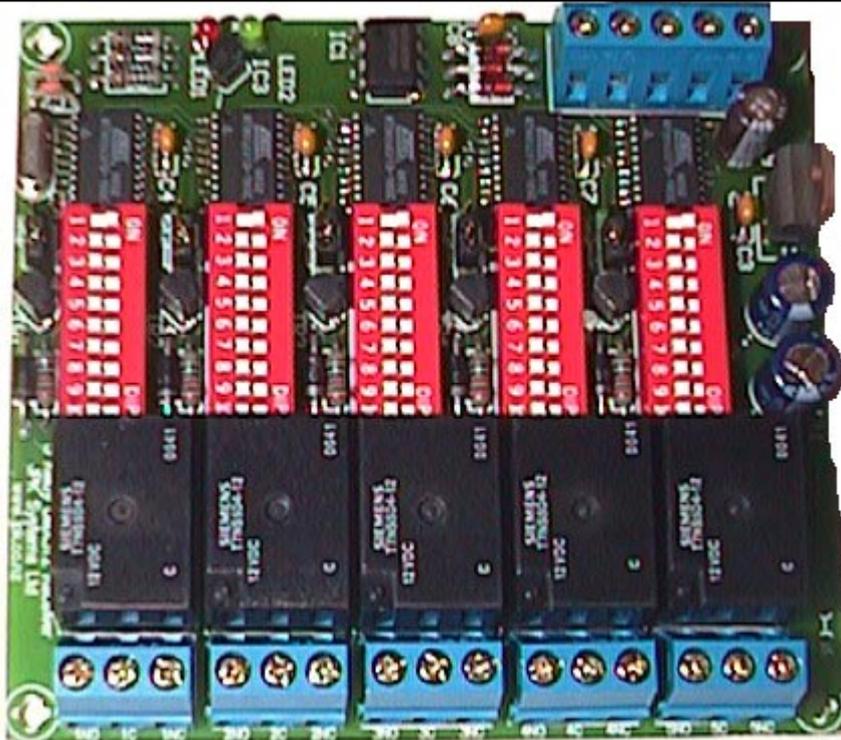

DMX contactor boards by JPK Systems Ltd provide both normally open and normally closed isolated contacts capable of switching low current signals and high current power loads. Integration of existing equipment into a DMX512 lighting control system is easy and cost effective.

## Features:

- Individual start channel selection
- Individually adjustable switching thresholds
- Power and DMX512 indication
- Control up to 10A loads with normally open or normally closed contacts available.
- Very compact
- DMX512 start channel selectable
- Over voltage protection diodes on DMX line

## Specifications:

<i>Input signal:</i>	DMX512
<i>Outputs:</i>	5 Relays
<i>Relay</i>	Moving clamp screw
<i>Connections:</i>	terminals
<i>Contact rating:</i>	10A at 250Vac 12A at 125Vac 10A at 30Vdc
<i>Power requirements:</i>	12Vdc @ 175mA
<i>Dimensions:</i>	98 x 87mm (3.8" x 3.4")

## Model Number:

0018-001 (5 Channel DMX contactor board)

## Local Distributor:

# JPK Systems Ltd

PO Box 26-525, Epsom  
Auckland, New Zealand  
Tel: +64 21 672535 Fax: +64 21 672564

<http://www.jpk.co.nz>  
[info@jpk.co.nz](mailto:info@jpk.co.nz)